



## IVR 605




Brass gate valve PN 16 - Threaded ends F/F

Клинова засувка латунна PN 16 - З'єднання В/В



IMPIEGHI: Le valvole a saracinesca IVR 605 sono adatte per impiantistica idraulica, installazioni idrotermosanitarie ed impianti di irrigazione.

APPLICATIONS: IVR 605 gate valves are suitable for use in hydraulic, sanitary and irrigation plants.

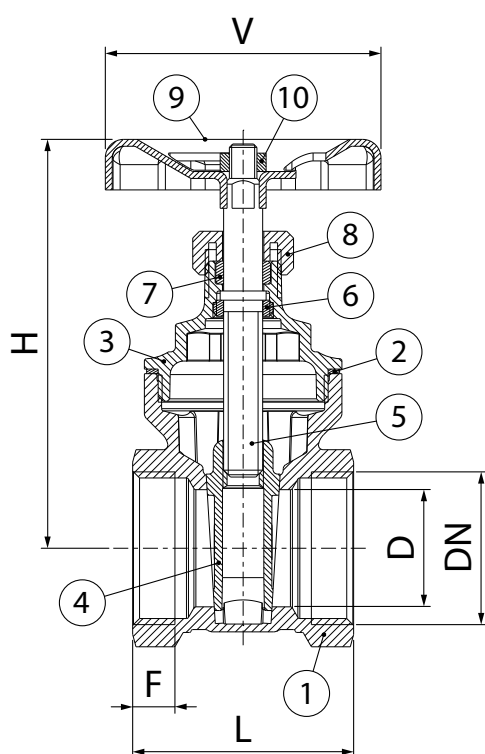


| N  | DENOMINAZIONE<br>PART NAME | MATERIALE<br>MATERIAL                         | TRATTAMENTO<br>TREATMENT |
|----|----------------------------|-----------------------------------------------|--------------------------|
| 1  | Corpo - Body               | Ottone - Brass<br>CW617N - UNI EN 12165       |                          |
| 2  | Guarnizione - Gasket       | Fibra termoresistente<br>Heat resisting fibre |                          |
| 3  | Vitone - Bonnet            | Ottone - Brass<br>CW617N - UNI EN 12165       |                          |
| 4  | Cuneo - Wedge              | Ottone - Brass<br>CW617N - UNI EN 12165       |                          |
| 5  | Asta - Stem                | Ottone - Brass<br>CW614N - UNI EN 12164       |                          |
| 6  | Ghiera - Screwed ring      | Ottone - Brass<br>CW614N - UNI EN 12164       |                          |
| 7  | Guarnizione asta - Packing | PTFE                                          |                          |
| 8  | Premistoppa - Packing nut  | Ottone - Brass<br>CW614N - UNI EN 12164       |                          |
| 9  | Volantino - Handwheel      | Acciaio<br>Steel                              | Verniciato<br>Painted    |
| 10 | Dado - Nut                 | Acciaio<br>Steel                              | Zincato<br>Zinc plated   |

### DIMENSIONI - DIMENSIONS (mm)

| DN     | L   | H   | D   | F  | V   |
|--------|-----|-----|-----|----|-----|
| 1/4"   | 33  | 67  | 11  | 8  | 45  |
| 3/8"   | 33  | 67  | 13  | 8  | 45  |
| 1/2"   | 38  | 69  | 15  | 10 | 50  |
| 3/4"   | 44  | 77  | 19  | 11 | 50  |
| 1"     | 48  | 90  | 24  | 12 | 60  |
| 1 1/4" | 51  | 97  | 32  | 13 | 60  |
| 1 1/2" | 58  | 108 | 37  | 14 | 70  |
| 2"     | 63  | 131 | 47  | 15 | 80  |
| 2 1/2" | 64  | 155 | 60  | 15 | 90  |
| 3"     | 75  | 183 | 72  | 18 | 100 |
| 4"     | 85  | 225 | 93  | 19 | 120 |
| 5"     | 96  | 270 | 119 | 21 | 140 |
| 6"     | 104 | 340 | 143 | 24 | 175 |



Solo su richiesta  
Only on request



Esclusi DN 1/4", 3/8", 2 1/2", 3", 5", 6"  
Excluding DN 1/4", 3/8", 2 1/2", 3", 5", 6"

Tutte le caratteristiche tecniche dei prodotti sono soggette a modifiche senza preavviso - All product's technical specifications are subject to modification without prior notice