


CODE 1053-A223



Punta flangia - Flanged insert - Bout bride - Punta de brida - Spitze des Flansches - Фланцевый переходник

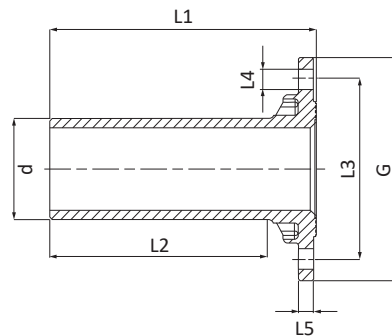


CODE	DIM d (DN) [mm]	G [mm]-	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L5 [mm]	NF	PN [bar]	PACK [UMV]
1053063000001	63 (DN50)	163	197	161	125	18	12	4	16	- <i>New</i>
1053063001001	63 (DN65)	183	201	161	145	18	12	4	16	- <i>New</i>
1053075000001	75 (DN65)	183	212	175	145	18	12	4	16	- <i>New</i>
1053075001001	75 (DN80)	199	218	175	160	18	12	8	16	- <i>New</i>
1053090000001	90 (DN80)	200	240	200	160	18	14	8	16	9
1053110001001	110 (DN80)	200	305	270	160	18	14	8	16	8
1053110000001	110 (DN100)	224	305	260	180	18	14	8	16	7


Flangia abbinabile da ordinare separatamente - Matching flange to be ordered separately - La bride correspondente est à commander séparément
La brida compatible se vende por separado - Die passende Flansch muss separat bestellt werden - Фланец в комплект не входит

Flangia in acciaio zincato - Galvanized steel flange - Bride en acier zingué - Brida de acero cincado
Flansch aus verzinktem Stahl - Фланец из оцинкованной стали

CODE	DIM [mm]	NF	PACK [UMV]
A223000003	63 (DN50)	4	-
A223000004	63 (DN65)	4	-
A223000005	75 (DN65)	4	-
A223000006	75 (DN80)	8	-
A223000007	90 (DN80) e 110 (DN80)	8	-
A223000009	110 (DN100)	8	-



CODE 1006



CODE 1005

ESEMPIO D'INSTALLAZIONE / EXAMPLE OF USE

Idoneo all'inserimento nell'uscita a compressione dei raccordi Unidelta
Suitable for insertion into the compression exit of Unidelta fittings
Approprié pour l'insertion des raccords à compression Unidelta
Apto para inserción en la salida de compresión de los accesorios Unidelta
Zum Einfügen in das Gewinde von den Klemmverbindungen Unidelta geeignet
Подходит для вставки в компрессионную муфту фитингов Unidelta